

BARE COPPER

SOLID & STRANDED BARE COPPER SOFT - MEDIUM - HARD DRAWN

A

Construction

SOLID:


- ASTM B-1-HD TEMPER UL.
- ASTM B-2-MHD TEMPER UL.
- ASTM B-3-SD TEMPER UL.
- ASTM B-33 TINNED SOFT OR ANNEALED.

STRANDED:

- ASTM B-8-ALL TEMPERS UL.
- CONCENTRIC LAY UL.

Application:

- Solid or stranded (MHD) or (HD) for use overhead.
- Outdoors on insulators for distribution.
- Circuits stranded (MHD) or (SD) for grounding.
- Round solid (HD) for Trolley wire.

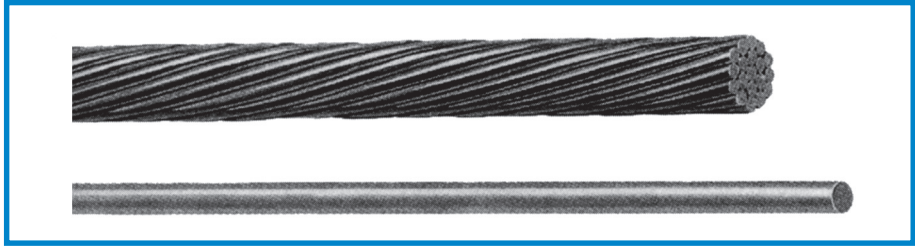

CUSTOM CATALOG NUMBER	SIZE	STRAND	NOMINAL O. D.	NOMINAL WEIGHT
	AWG/MCM		INCHES	LBS./MFT
SOLID COPPER CONDUCTOR - HARD DRAWN				
26300	14	Solid	0.064	12
26301	12	Solid	0.081	20
26302	10	Solid	0.102	31
26303	8	Solid	0.129	50
26304	6	Solid	0.162	79
26305	4	Solid	0.204	126
26306	2	Solid	0.258	201
SOLID COPPER CONDUCTOR - SOFT DRAWN				
26320	8	Solid	0.129	50
26321	6	Solid	0.162	79
26322	4	Solid	0.204	126
26323	2	Solid	0.257	201
STRANDED COPPER CONDUCTOR - SOFT DRAWN				
26370	8	7	0.146	51
26371	6	7	0.184	81
26372	4	7	0.232	129
26373	2	7	0.292	205
26374	1	19	0.332	259
26375	1/0	19	0.373	326
26376	2/0	19	0.419	411
26377	3/0	19	0.470	518
26378	4/0	19	0.528	653
26379	250	37	0.575	772
26380	300	37	0.630	926
26381	350	37	0.681	1081
26382	400	37	0.728	1235
26383	500	37	0.813	1544
26384	600	37	0.893	1853
26385	750	61	0.998	2316
26386	1000	61	1.152	3088

NOTE: Also available in tinned copper.
Add "T" suffix for part number.
Check factory for availability.

Custom Cable Corp.

242 Butler Street • Westbury, New York 11590-3193 • Tel: (516) 334-3600 • Toll Free: (800) 832-3600 • FAX: (516) 334-3989

www.customwireandcable.com • email: sales@customwireandcable.com