

FIRE ALARM CABLE

UNSHIELDED, NON-PLENUM
NEC TYPE FPLR/CMG, FT4 CABLE - PVC

P

Construction

Conductor:

- Fully annealed solid bare copper per ASTM B-3.

Insulation:

- Color coded, Foam Polypropylene

Jacket:

- Red* PVC.
- Suitable for use from -20°C to +75°C.

Applications:


- Wiring of fire alarms.
- Smoke detectors.
- Voice communications.
- Burglar alarms.
- Fire protective circuits.
- Suggested voltage rating: 300 volts, RMS Max.

Industry Approvals:

- UL Type FPLR (UL: 60°C, 300V).
- NEC Article 760.
- California State Fire Marshall Approved.
- Passes UL 1666 Riser Flame Test.
- Type CMR/FPLR 75°C, Sun Res.
- Type CMG FT4.
- ROHS.

Packaging:

- 1000 ft.

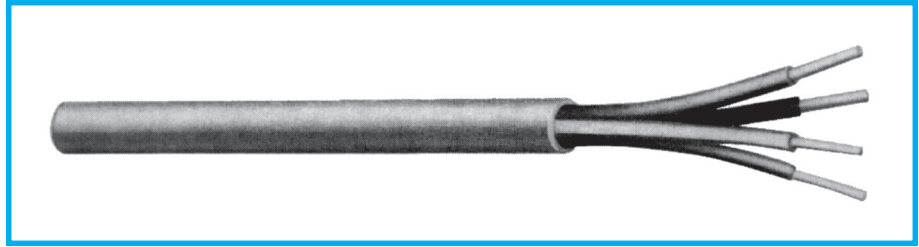

CUSTOM CATALOG NUMBER	SIZE	NUMBER OF COND'S	STRAND	NOMINAL INSULATION		NOMINAL O.D. INCHES	NOMINAL WEIGHT LBS/MFT
				INSULATION	JACKET		
3160	18	2	Solid	0.006	0.014	0.132	16
3162	18	4	Solid	0.006	0.014	0.154	30
3170	16	2	Solid	0.006	0.014	0.154	23
3172	16	4	Solid	0.006	0.014	0.180	44
3175	14	2	Solid	0.008	0.017	0.194	35
3177	14	4	Solid	0.008	0.017	0.228	70
3180	12	2	Solid	0.010	0.017	0.236	52

Color Code Chart

No. of Conductors	Color
1	Black
2	Red
3	Green
4	Yellow

*Other color jackets available on Special Orders.

Custom Cable Corp.



UL
LISTED
Type FPLR

Passes
UL 1666
Flame Test

Underwriters Laboratories Inc.

242 Butler Street • Westbury, New York 11590-3193 • Tel: (516) 334-3600 • Toll Free: (800) 832-3600 • FAX: (516) 334-3989

www.customwireandcable.com • email: sales@customwireandcable.com