

# TYPE W-MAGNET CRANE CABLE - ROUND - 2 CONDUCTORS

600/2000 VOLT, 90°C


## Construction

### Description:

- Extra flexible bare annealed copper conductors, 90°C heat resistant .060 EPDM insulation, polyester braid separator over conductors, neoprene or CPE jacket.

### Applications:

- Mines, Cranes, Heavy industrial machinery, Portable equipment.
- Scrap, recycling and other lifting magnet, crane application.

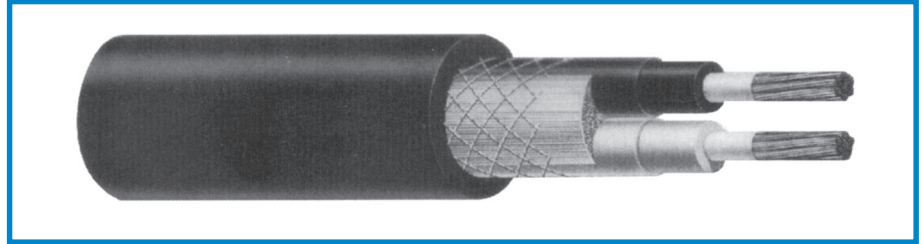

INSULATION THICKNESS (INCHES) .060

CUSTOM CATALOG NUMBER	SIZE	STRAND	NOMINAL O.D.	CURRENT	NOMINAL WEIGHT
	AWG/MCM		INCHES	AMPS	LBS/MFT
<b>90°C 600/2000 VOLTS</b>					
9310	8	133	0.820	74	430
9311	6	133	0.915	99	581
9312	4	133	1.065	130	813
9313	2	133	1.255	174	1182

Conductor Color Coding: Black - White

# UNDERGROUND LOW ENERGY LIGHTING CABLE

60°C 150 VOLT UL - LANDSCAPE LIGHTING

## Construction

### Conductor:

- Annealed bare copper.

### Insulation:

- Black PVC - sunlight resistant.
- Temperature range -20°C to +60°C.

### Applications:


- Landscape and outdoor lighting.
- Outdoor security wiring.

### Features:

- UL Listed.
- OSHA acceptable.

### Packaging:

- 500 ft., 1000 ft. spools.

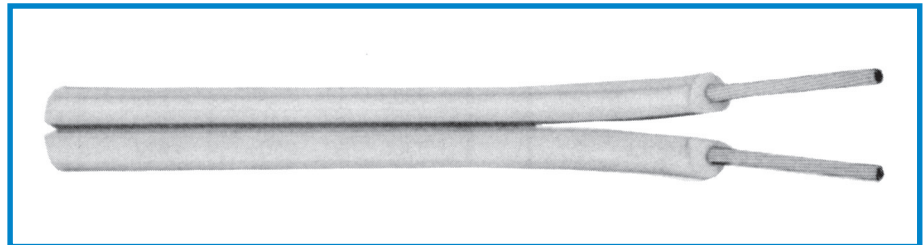

CUSTOM CATALOG NUMBER	SIZE	NUMBER OF CONDUCTORS	STRAND	NOMINAL INSULATION THICKNESS	NOMINAL O.D.	CURRENT	NOMINAL WEIGHT
	AWG/MCM			INCHES	INCHES	AMPS	LBS/MFT
20080	16	2	26/30	0.045	0.150x0.295	13	42
20081	14	2	41/30	0.045	0.170x0.354	18	60
20082	12	2	65/30	0.045	0.190x0.392	25	80
20083	10	2	104/30	0.045	0.222x0.440	30	99
20084	8	2	133/.0113	0.060	0.295x0.590	40	173



OSHA Acceptable  
Occupational Safety and Health  
Administration



# Custom Cable Corp.