

BUS DROP CABLE

UL LISTED BUS DROP CABLES - THERMOPLASTIC JACKETED (PVC) - 600 VOLT

Construction

Conductor:

- Fully annealed stranded bare copper per ASTM B-8 or B-174 as applicable.

Insulation:

- Premium grade color coded polyvinyl chloride (PVC).
- Color Code:
(3 cdr) Black, White, Red
(4 cdr) Black, White, Red, Blue.

Jacket:

- Thermoplastic (PVC) jacket, gray.
- Temperature range: -20°C to +60°C.
- Voltage rating 600 volts.

Jacket Marking:

- All sizes indent printed showing gauge, number of conductors, voltage, type and (UL).

Applications:


- As branches from busways per NEC.
- Connection of stationary equipment to facilitate relocation of equipment.

Features:

- Used in dry location.
- One uninsulated ground conductor per interstice.
- Resistant to oils, lubricants, water, acids, alkalis, ozone and abrasion.

Industry Approvals:

- UL.
- OSHA Acceptable.

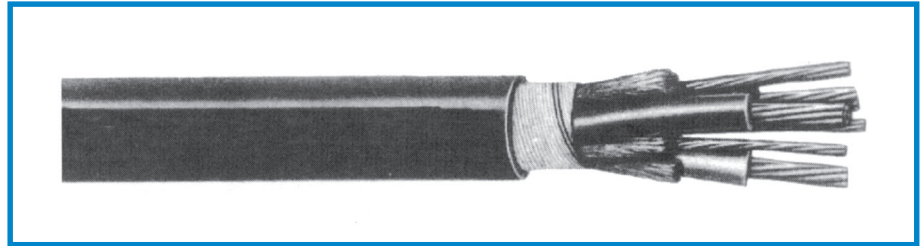

CUSTOM CATALOG NUMBER	SIZE	NO. OF COND'S	STRAND	GROUND WIRES (3)	NOM. INSUL. THICKNESS	NOMINAL O.D.	CURRENT	NOMINAL WEIGHT
	AWG/MCM			AWG/MCM	INCHES	INCHES	AMPS	LBS/MFT
THREE CONDUCTORS WITH THREE GROUNDING CONDUCTORS								
20200	14	3	19	18	0.030	0.400	15	120
20201	12	3	19	16	0.030	0.440	20	150
20202	10	3	19	14	0.030	0.500	30	225
20203	8	3	19	14	0.045	0.665	40	370
20204	6	3	19	14	0.060	0.815	55	600
20205	4	3	19	12	0.060	0.955	70	820
20206	2	3	133	12	0.060	1.175	95	1190
FOUR CONDUCTORS WITH FOUR GROUNDING CONDUCTORS								
20210	14	4	7	18	0.030	0.440	12	133
20211	12	4	7	16	0.030	0.480	16	179
20212	10	4	7	14	0.030	0.570	24	271
20213	8	4	7	14	0.045	0.720	32	426
20214	6	4	7	14	0.060	0.890	44	662
20215	4	4	7	12	0.060	1.050	56	990
20216	2	4	7	12	0.060	1.190	76	1420

NOTE: 2/4 conductor is not UL listed.

F



OSHA Acceptable
Occupational Safety and Health
Administration

Custom Cable Corp.