

PORTABLE CORD

TYPE S 600 VOLT & TYPE SJ 60°C 300 VOLT UL/CSA

Construction

Conductor:

- Fully annealed stranded bare copper per ASTM B-174.

Insulation:

- Color coded rubber.

Jacket:

- Black Rubber.
- Temperature Range: -40°C to +60°C.
- Voltage Rating: 300 volts Type SJ. 600 volts Type S.

Applications:

- Portable lighting.
- Battery chargers.
- Garage door openers.
- Small tools and associated equipment.
- Washing machines.
- Refrigerators.
- Small motors.
- Sound equipment.

Features:


- Good flexibility in low temperatures.
- Suitable for use in conditions where the cord is not subject to acid, grease, oil, or solvents.

Industry Approvals:

- UL Flexible Cord - UL 62
- CSA Flexible Cord - C22.2-49 where applicable.
- JC 580.

Packaging:

- 250 ft.
- Other put-ups available, consult factory.

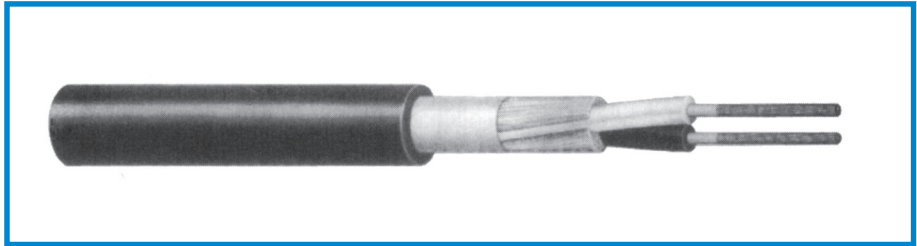

CUSTOM CATALOG NUMBER	SIZE AWG/MCM	STRAND	NOMINAL THICKNESS (INCHES)		NOMINAL O.D.	CURRENT	NOMINAL WEIGHT
			INSULATION	JACKET	INCHES	AMPS	LBS/MFT
RUBBER JACKET TYPE S 600 VOLT BLACK + 60°C UL-CSA*							
9070	18/2	16/30	0.030	0.060	0.350	10	68
9071	18/3	16/30	0.030	0.060	0.370	10	81
9072	18/4	16/30	0.030	0.060	0.400	7	97
9073	16/2	26/30	0.030	0.060	0.370	13	79
9074	16/3	26/30	0.030	0.060	0.390	13	96
9075	16/4	26/30	0.030	0.060	0.430	10	116
9076	14/2	41/30	0.045	0.080	0.510	18	137
9077	14/3	41/30	0.045	0.080	0.540	18	164
9078	14/4	41/30	0.045	0.080	0.580	15	199
9079	12/2	65/30	0.045	0.095	0.590	25	175
9080	12/3	65/30	0.045	0.095	0.620	25	222
9081	12/4	65/30	0.045	0.095	0.670	20	262
9082	10/2	104/30	0.045	0.095	0.640	30	232
9083	10/3	104/30	0.045	0.095	0.670	30	282
9084	10/4	104/30	0.045	0.095	0.730	25	352
RUBBER JACKET TYPE SJ 300 VOLT BLACK + 60°C UL-CSA							
9101	18/2	16/30	0.030	0.030	0.290	10	45
9102	18/3	16/30	0.030	0.030	0.310	10	60
9103	18/4	16/30	0.030	0.030	0.320	7	70
9104	16/2	26/30	0.030	0.030	0.315	13	60
9105	16/3	26/30	0.030	0.030	0.330	13	75
9106	16/4	26/30	0.030	0.030	0.365	10	90
9107	14/2	41/30	0.030	0.030	0.340	18	75
9108	14/3	41/30	0.030	0.030	0.365	18	105
9109	14/4	41/30	0.030	0.030	0.395	15	120
9110	12/2	65/30	0.030	0.045	0.410	25	110
9111	12/3	65/30	0.030	0.045	0.430	25	140
9112	12/4	65/30	0.030	0.045	0.470	20	180
9113	10/2	104/30	0.045	0.060	0.550	30	185
9114	10/3	104/30	0.045	0.060	0.590	30	240
9115	10/4	104/30	0.045	0.060	0.655	25	305

Color Code: 2 conductors Black, White
 3 conductors Black, White, Green
 4 conductors Black, White, Red, Green

* NOTE: Customer must specify if CSA is needed on Type S. Normally UL only.

Custom Cable Corp.



242 Butler Street • Westbury, New York 11590-3193 • Tel: (516) 334-3600 • Toll Free: (800) 832-3600 • FAX: (516) 334-3989

www.customwireandcable.com • email: sales@customwireandcable.com