

TINNED COPPER TUBULAR BRAID

QQ-B-575B & QQ-W-343E


Construction

Description:

- Each strand soft drawn tinned copper wire meets Fed. Spec. QQ-W-343E and ASTM-B-33.
- Shield coverage: 95% when placed over mandrel of equivalent diameter to that of braid interior.

Application:

- Used as both shielding and protective covering.

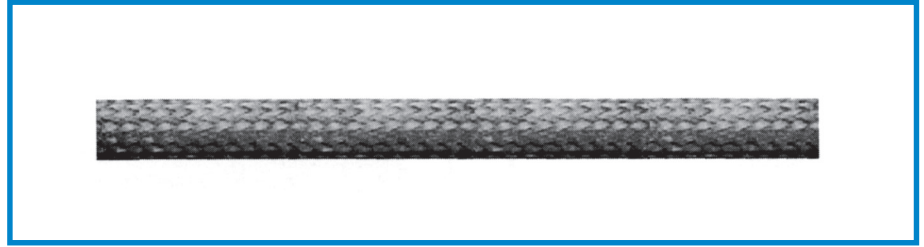

CUSTOM CATALOG NUMBER	NOM. FLAT WIDTH	SIZE	NOM. CIRC. MIL AREA	BRAID CONSTRUCTION			CURRENT	NOMINAL WEIGHT
	INCHES	AWG/MCM	CM	AWG. OF INDIV. ENDS	CARRIERS	TOTAL NO. OF INDIV. ENDS	AMPS ¹	LBS/MFT
1075	1/32	22	600	36	24	24	7	4
1076	1/16	19	1200	36	24	48	11	7
1077	5/64	18	1800	36	24	72	16	8
1078	7/64	16	2400	36	24	96	19	11
1079	1/8	15	3000	36	24	120	25	13
1080	5/32	12	6000	36	24	240	40	23
1081	11/64	14	4200	36	24	168	32	29
1082	13/64	11	7630	34	24	192	46	36
1083	1/4	10	9600	36	24	384	53	38
1084	9/32	9	12060	30	24	120	60	40
1085	3/8	10	9600	36	48	384	53	42
1086	7/16	6	24120	30	24	240	90	84
1087	1/2	9	13200	36	48	528	62	60
1088	9/16	3	48240	30	48	480	145	154
1089	21/32	1	77180	30	48	768	190	253
1090	25/32	7	21600	36	48	864	88	82

¹ Values shown are for bare cable in free air at 30°C(86°F) and intended as a reference guide only. Actual values will depend on permissible temperature rise, permissible voltage drop and other conditions of service.

Custom Cable Corp.