

HOOK-UP WIRE

UL MTW, AWM, THW/CSA TEW, MTW, LIGHT WALL
 UL MTW, THW, HEAVY WALL

0

Construction

Conductor:

- Fully annealed stranded bare copper per ASTM B-3.

Insulation:

- Color coded PVC.
- Temperature range: -40°C to +90°C (MTW); -20°C to +105°C (TEW/AWM).
- Voltage Rating: 600 Volts.

Applications:

- Motor and transformer lead.
- External wiring of machinery.
- Building wire.

Features:


- Outstanding oil, flame, and moisture resistance.
- Extra flexible.
- Resistance to corrosion and heat.

Industry Approvals:

- UL and NMTBA type MTW/AWM (15080-15085).
- CSA AWM (15080-15085).
- UL and NMBTA (15092-15097).
- NEC-THW (15092-15097).
- Passes VW-1 S Vertical Flame Test.
- OSHA acceptable.

Packaging:


- 500 ft Spools.

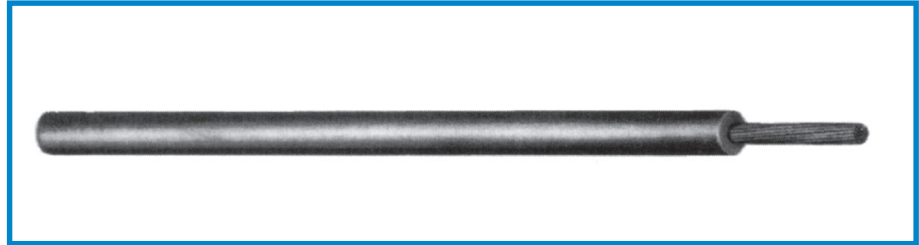

CUSTOM CATALOG NUMBER	SIZE	STRAND	NOM. INSUL. THICKNESS	NOMINAL O.D.	NOMINAL WEIGHT
	AWG/MCM		INCHES	INCHES	LBS/MFT
UL MTW, AWM, THW/CSA TEW, MTW LIGHT WALL					
15080	18	16/0.0100	0.031	0.110	11
15081	16	26/0.0100	0.031	0.122	14
15082	14	19/0.0159	0.031	0.136	20
15083	12	19/0.0185	0.031	0.155	28
15084	10	19/0.0234	0.031	0.180	44
15085	8	19/0.0295	0.045	0.246	74
UL MTW, THW, HEAVY WALL					
15092	14	19/0.0159	0.045	0.166	25
15093	12	19/0.0185	0.045	0.185	31
15094	10	19/0.0234	0.045	0.210	51
15095	8	19/0.0295	0.060	0.277	86
15096	6	19/0.0372	0.060	0.315	118
15097	4	19/0.0469	0.060	0.365	170

Specify color when ordering.

Custom Cable Corp.



Passes UL-VW-1 Flame Test
 Underwriters Laboratories Inc.

