

# TEFLON TFE® HOOK-UP WIRE

MIL-W-16878/4 TYPE E 600 VOLT


MIL-W-16878/5 TYPE EE 1000 VOLT

0

## Construction

### Description:

- Teflon® Type E & EE - Extruded.
- Single conductor stranded silver plated copper, TFE extruded Teflon® insulation. Resistant to acid, alkalis, oil, flame, moisture, solvents and fungus.

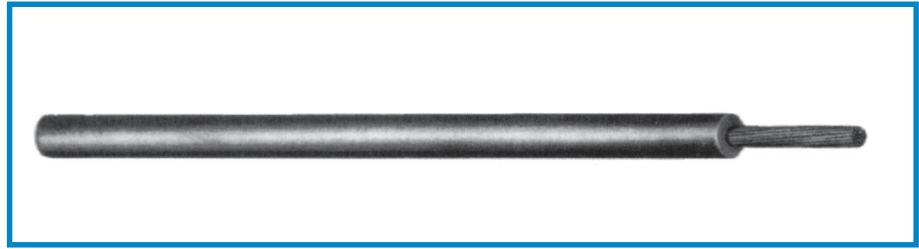

CUSTOM CATALOG NUMBER	SIZE	STRAND	TYPE DESIGNATION	NOM. INSUL. THICKNESS	NOMINAL O.D.	NOMINAL WEIGHT
	AWG/MCM			INCHES	INCHES	LBS./MFT
<b>TEFLON® TYPE E - EXTRUDED 600 VOLT -65°C to +200°C</b>						
856	24	7/32	E-24	0.010	0.044	3
857	24	19/36	E-24	0.010	0.044	3
858	22	7/30	E-22	0.010	0.050	4
859	22	19/34	E-22	0.010	0.050	4
860	20	7/28	E-20	0.010	0.058	5
861	20	19/32	E-20	0.010	0.058	6
862	18	19/30	E-18	0.010	0.069	8
863	16	19/29	E-16	0.010	0.080	11
864	14	19/27	E-14	0.012	0.094	16
865	12	19/25	E-12	0.012	0.113	24
866	10	37/26	E-10	0.012	0.134	32
<b>TEFLON® TYPE EE - EXTRUDED 1000 VOLT -65°C to +200°C</b>						
875	24	19/36	EE-24	0.014	0.054	4
876	22	7/30	EE-22	0.014	0.060	5
877	22	19/34	EE-22	0.014	0.060	5
878	20	7/28	EE-20	0.014	0.068	6
879	20	19/32	EE-20	0.014	0.068	7
880	18	19/30	EE-18	0.014	0.079	10
881	16	19/29	EE-16	0.014	0.089	12
882	14	19/27	EE-14	0.017	0.105	18
883	12	19/25	EE-12	0.017	0.124	26
884	10	37/26	EE-10	0.017	0.145	38
885	8	133/29	EE-8	0.020	0.210	56

Specify color when ordering.

NOTE: MIL-W-22759 is available. Please specify color and check with sales office for pricing and availability details.

# Custom Cable Corp.

242 Butler Street • Westbury, New York 11590-3193 • Tel: (516) 334-3600 • Toll Free: (800) 832-3600 • FAX: (516) 334-3989

[www.customwireandcable.com](http://www.customwireandcable.com) • email: [sales@customwireandcable.com](mailto:sales@customwireandcable.com)