

COMMUNICATION AND CONTROL CABLE

MULTI-PAIRED UNSHIELDED
300 VOLT - UL 2464 CSA FT-4 NEC TYPE CL2 AND CM

Construction

Conductor:

- Fully annealed stranded tinned copper per ASTM B-33.
- Twisted pairs.

Insulation:

- Color coded PVC.
- Color Code: See Chart #9.

Jacket:

- PVC, chrome gray.
- Temperature Range: -20°C to +80°C (UL), -20°C to +90°C (CSA).
- Voltage Rating: 300 volts.

Applications:


- Computers.
- Industrial equipment.
- Data transmission.
- Control circuits.
- Suitable for EIA RS-232 applications.

Industry Approvals:

- NEC Article 725 Type CL2.
- NEC Article 800 Type CM.
- UL Style 2464 (UL 80°C 300V).
- Passes UL 70,000 BTU Vertical Flame Test.
- Passes CSA FT-4 Flame Test.
- CSA PCC (CSA: 60°C)

Packaging:

- 500 ft, 1000 ft or bulk spools.

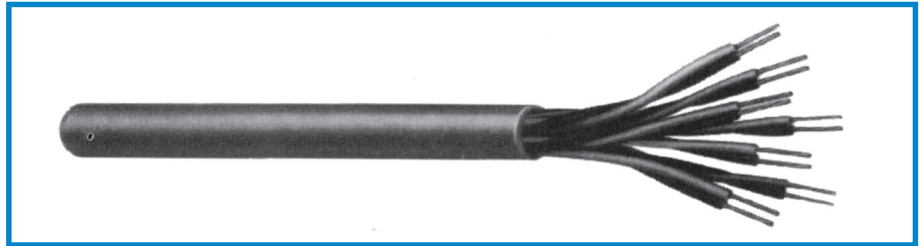

CUSTOM CATALOG NUMBER	SIZE	NUMBER OF PAIRS	STRAND	NOMINAL INSULATION THICKNESS	NOMINAL JACKET THICKNESS	NOMINAL O.D.	NOMINAL WEIGHT
	AWG/MCM			INCHES	INCHES	INCHES	LBS/MFT
1402	18	1	16/30	0.013	0.032	0.216	31
2902	18	2	16/30	0.013	0.032	0.320	57
2903	18	3	16/30	0.013	0.032	0.338	70
2904	18	4	16/30	0.013	0.032	0.372	84
2905	18	5	16/30	0.013	0.032	0.408	109
2906	18	6	16/30	0.013	0.032	0.445	129
2908	18	8	16/30	0.013	0.032	0.484	158
2909	18	9	16/30	0.013	0.032	0.522	183
2912	18	12	16/30	0.013	0.032	0.638	267
2915	18	15	16/30	0.013	0.032	0.703	333
2919	18	19	16/30	0.013	0.032	0.795	401



LISTED
TYPE CM/MP



LISTED
TYPE CM

Passes UL
Vertical Tray
Flame Test

Underwriters Laboratories Inc.



Underwriters Laboratories Inc.



Canadian Standard Association

Custom Cable Corp.