

COMMUNICATION AND CONTROL CABLE

MULTI-CONDUCTOR UNSHIELDED 60°C 350 VOLT RUBBER

P

Construction

Conductor:

- Fully annealed stranded tinned copper per ASTM B-33.

Insulation:

- Color coded rubber.
- Color Code: See Chart #5.

Jacket:

- Rubber, black.
- Temperature Range: -20°C to +60°C.
- Voltage Rating: 350 volts.

Applications:


- Energy management systems.
- Control circuits.
- Fire alarm control.
- Broadcast and studio requirements.

Features:

- Excellent impact resistance.
- High level of abrasion resistance.
- High flexibility.
- Excellent mechanical strength.
- Excellent moisture resistance.

Packaging:

- 500 ft, 1000 ft or bulk spools.

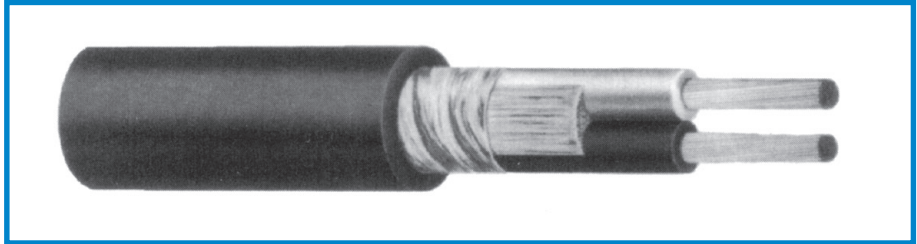

CUSTOM CATALOG NUMBER	SIZE	NUMBER OF COND'S	STRAND	NOMINAL INSULATION THICKNESS	NOMINAL JACKET THICKNESS	NOMINAL O.D.	NOMINAL WEIGHT
	AWG/MCM			INCHES	INCHES		INCHES
1650	20	2	26/34	0.020	0.035	0.240	36
1653	20	3	26/34	0.020	0.035	0.255	43
1654	20	4	26/34	0.020	0.035	0.275	52
1655	20	5	26/34	0.020	0.035	0.300	63
1656	20	6	26/34	0.020	0.035	0.315	74
1657	20	7	26/34	0.020	0.035	0.325	81
1658	20	8	26/34	0.020	0.035	0.360	88
1660	20	10	26/34	0.020	0.035	0.410	104
1662	20	12	26/34	0.020	0.035	0.460	145
1665	20	15	26/34	0.020	0.035	0.510	164
1670	20	20	26/34	0.020	0.035	0.610	219

Custom Cable Corp.

242 Butler Street • Westbury, New York 11590-3193 • Tel: (516) 334-3600 • Toll Free: (800) 832-3600 • FAX: (516) 334-3989

www.customwireandcable.com • email: sales@customwireandcable.com