

COMMUNICATION AND CONTROL CABLE

MULTI-CONDUCTOR BRAID SHIELD RUBBER 60°C

Construction

Conductor:

- Fully annealed stranded tinned copper per ASTM B-33.

Insulation:

- Color coded rubber.
- Color Code:
See Chart #5.

Shield:

- 80% tinned copper braid.

Jacket:

- Rubber, black.
- Temperature Range:
-20°C to +60°C.
- Suggested voltage rating:
300 volts.

Applications:


- Control circuits.
- Broadcast and studio applications.
- Audio interconnects.

Features:

- Impact and abrasion resistant.
- Flexible conductor strands for superior limpness.

Packaging:

- 500 ft, 1000 ft or bulk spools.

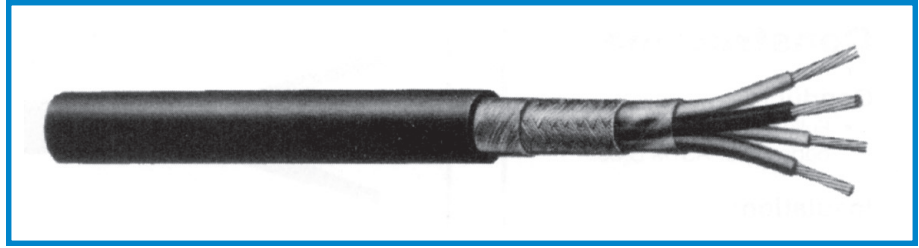

| CUSTOM CATALOG NUMBER | SIZE | NUMBER OF COND'S | STRAND | NOMINAL INSULATION THICKNESS | NOMINAL JACKET THICKNESS | NOMINAL O.D. | NOMINAL WEIGHT |
|-----------------------|---------|------------------|--------|------------------------------|--------------------------|--------------|----------------|
| | AWG/MCM | | | INCHES | INCHES | | |
| 7502 | 20 | 2 | 26/34 | 0.020 | 0.035 | 0.270 | 51 |
| 7503 | 20 | 3 | 26/34 | 0.020 | 0.035 | 0.285 | 56 |
| 7504 | 20 | 4 | 26/34 | 0.020 | 0.035 | 0.305 | 65 |
| 7505 | 20 | 5 | 26/34 | 0.020 | 0.035 | 0.330 | 80 |
| 7506 | 20 | 6 | 26/34 | 0.020 | 0.035 | 0.345 | 94 |
| 7507 | 20 | 7 | 26/34 | 0.020 | 0.035 | 0.360 | 100 |
| 7508 | 20 | 8 | 26/34 | 0.020 | 0.035 | 0.385 | 116 |
| 7510 | 20 | 10 | 26/34 | 0.020 | 0.035 | 0.440 | 130 |
| 7512 | 20 | 12 | 26/34 | 0.020 | 0.065 | 0.480 | 180 |
| 7520 | 20 | 20 | 26/34 | 0.020 | 0.065 | 0.570 | 280 |

Custom Cable Corp.

242 Butler Street • Westbury, New York 11590-3193 • Tel: (516) 334-3600 • Toll Free: (800) 832-3600 • FAX: (516) 334-3989

www.customwireandcable.com • email: sales@customwireandcable.com