

# COMMUNICATION AND CONTROL CABLE

## MULTI-CONDUCTOR BRAID SHIELDED NEOPRENE JACKET 60°C



### Construction

#### Conductor:

- Fully annealed stranded tinned copper per ASTM B-33.

#### Insulation:

- Color coded rubber.
- Color Code: See Chart #8.

#### Shield:

- 80% tinned copper braid.

#### Jacket:

- Neoprene, black.
- Temperature Range: -20°C to +60°C.
- Suggested voltage Rating: 300 volts.

#### Applications:


- Control circuits.
- Broadcast and Studio applications.
- Audio interconnects.

#### Features:

- Impact and abrasion resistant.
- Flexible conductor.
- Passes VW-1 Flame Test.

#### Packaging:

- 500 ft, 1000 ft or bulk spools.

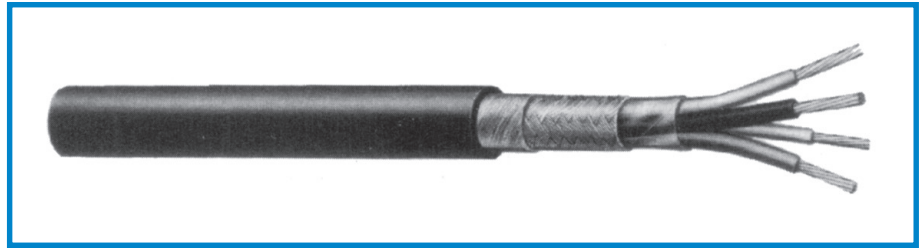

CUSTOM CATALOG NUMBER	SIZE	NUMBER OF COND'S	STRAND	NOMINAL INSULATION THICKNESS	NOMINAL JACKET THICKNESS	NOMINAL O.D.	NOMINAL WEIGHT
	AWG/MCM			INCHES	INCHES		
7002	18	2	41/34	0.020	0.035	0.295	63
7003	18	3	41/34	0.020	0.035	0.305	66
7004	18	4	41/34	0.020	0.035	0.330	80
7006	18	6	41/34	0.020	0.035	0.370	115
7008	18	8	41/34	0.020	0.035	0.420	160
7010	18	10	41/34	0.020	0.035	0.480	200
7012	18	12	41/34	0.020	0.065	0.555	240
7015	18	15	41/34	0.020	0.065	0.640	290
7020	18	20	41/34	0.020	0.065	0.695	375
7102	16	2	65/34	0.025	0.035	0.335	85
7103	16	3	65/34	0.025	0.035	0.355	92
7104	16	4	65/34	0.025	0.035	0.385	107
7106	16	6	65/34	0.025	0.040	0.445	145
7108	16	8	65/34	0.025	0.040	0.510	230
7110	16	10	65/34	0.025	0.040	0.585	285
7202	14	2	41/30	0.030	0.040	0.395	125
7203	14	3	41/30	0.030	0.040	0.425	153
7204	14	4	41/30	0.030	0.040	0.475	180
7206	14	6	41/30	0.030	0.040	0.515	260
7302	12	2	65/30	0.030	0.040	0.440	130
7303	12	3	65/30	0.030	0.040	0.440	160
7304	12	4	65/30	0.030	0.040	0.505	200
7402	10	2	105/30	0.030	0.040	0.500	240
7403	10	3	105/30	0.030	0.040	0.520	300

# Custom Cable Corp.