

MIL 16878D TYPE B/N CABLE

SHIELDED - PVC JACKET - 105°C 600V



Construction

Conductor:

- Stranded tinned copper.

Insulation:

- Polyvinylchloride and 0.003" clear nylon insulation, conductors cabled.
- Color Code:
See Chart #23.

Shield:


- Overall tinned copper braid shield (90%).

Jacket:

- White polyvinyl.

Temperature Rating:

- -55°C to +105°C.

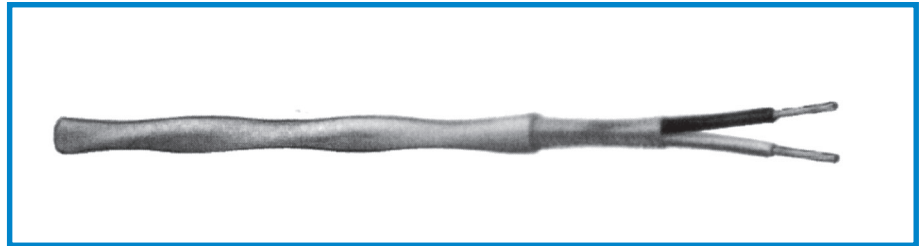

CUSTOM CATALOG NUMBER	SIZE	NUMBER OF COND'S	STRAND	NOMINAL JACKET THICKNESS	NOMINAL O.D.	NOMINAL WEIGHT
	AWG/MCM			INCHES	INCHES	LBS/MFT
8321	22	1	19/34	0.010	0.100	11
8322	22	2	19/34	0.020	0.176	21
8323	22	3	19/34	0.020	0.184	27
8324	22	4	19/34	0.020	0.200	31
8331	20	1	19/32	0.010	0.109	13
8332	20	2	19/32	0.020	0.192	26
8333	20	3	19/32	0.025	0.210	34
8334	20	4	19/32	0.025	0.226	40
8341	18	1	19/30	0.012	0.120	16
8342	18	2	19/30	0.021	0.210	37
8343	18	3	19/30	0.022	0.227	42
8344	18	4	19/30	0.023	0.250	61
8351	16	1	19/29	0.016	0.143	21
8352	16	2	19/29	0.025	0.250	41
8353	16	3	19/29	0.025	0.264	53
8354	16	4	19/29	0.027	0.291	65
8361	14	1	19/27	0.011	0.145	25
8362	14	2	19/27	0.018	0.265	48

Custom Cable Corp.