

COMPUTER CABLE

MULTI-CONDUCTOR FOIL SHIELD

80°C 300 VOLT UL 2464 CSA PCC NEC TYPE CM

Construction

Conductor:

- Fully annealed stranded tinned copper per ASTM B-33.

Insulation:

- Color coded semi-rigid PVC per UL 1061.
- Color Code:
See Chart #1 (6002-6010).
See Chart #2 (6015-6055).

Shield:

- 100% Aluminum/polyester, 25% overlap, foil facing out.
- Stranded tinned copper drain wire.

Jacket:

- PVC, chrome gray.
- Temperature Range:
-20°C to +80°C.
- Voltage Rating: 300 volts.

Applications:

- Computer interconnections.
- Data transmission.
- Control circuits.
- Industrial equipment control.
- Suitable for EIA RS-232 applications.

Equipment Interfaces:

- Stratus/32 processing system.
- DEC EIA extension cable.
- DEC interface systems.

Features:


- Heavy duty jacket for superior abrasion resistance.

Industry Approvals:

- NEC Article 800 Type CM.
- UL Style 2464.
- CSA PCC (CSA: 60°C).
- Passes UL 70,000 BTU Vertical Flame Test.
- Passes CSA FT-4 Flame Test.

Packaging:

- 500 ft, 1000 ft or bulk spools.

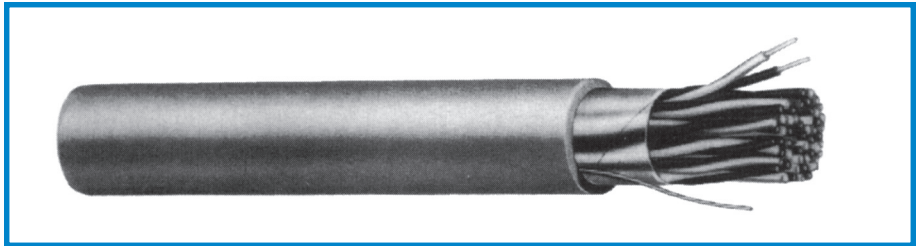

CUSTOM CATALOG NUMBER	SIZE AWG/MCM	NO. OF COND'S	STRAND	NOMINAL THICKNESS (INCHES)		NOMINAL O.D. INCHES	NOMINAL WEIGHT LBS/MFT
				INSULATION	JACKET		
6002	24	2	7/32	0.010	0.032	0.159	18
6003	24	3	7/32	0.010	0.032	0.165	20
6004	24	4	7/32	0.010	0.032	0.180	23
6005	24	5	7/32	0.010	0.032	0.195	25
6006	24	6	7/32	0.010	0.032	0.202	31
6007	24	7	7/32	0.010	0.032	0.215	32
6008	24	8	7/32	0.010	0.032	0.225	36
6009	24	9	7/32	0.010	0.032	0.240	39
6010	24	10	7/32	0.010	0.032	0.250	42
6015	24	15	7/32	0.010	0.032	0.277	54
6020	24	20	7/32	0.010	0.032	0.303	66
6025	24	25	7/32	0.010	0.032	0.345	90
6030	24	30	7/32	0.010	0.032	0.365	93
6040	24	40	7/32	0.010	0.032	0.405	113
6050	24	50	7/32	0.010	0.032	0.445	138
6055	24	60	7/32	0.010	0.032	0.475	161



LISTED
TYPE CM

Passes UL
Vertical Tray
Flame Test

Underwriters Laboratories Inc.



Custom Cable Corp.

242 Butler Street • Westbury, New York 11590-3193 • Tel: (516) 334-3600 • Toll Free: (800) 832-3600 • FAX: (516) 334-3989

www.customwireandcable.com • email: sales@customwireandcable.com