

COAXIAL CABLE

BROADCAST APPLICATIONS


Construction

Applications:

- Suitable for RF signal transmission.
- MATV.
- CATV.
- Local area network.
- Broadcast.
- Amateur radio.

Packaging:

- 1000 ft spools.

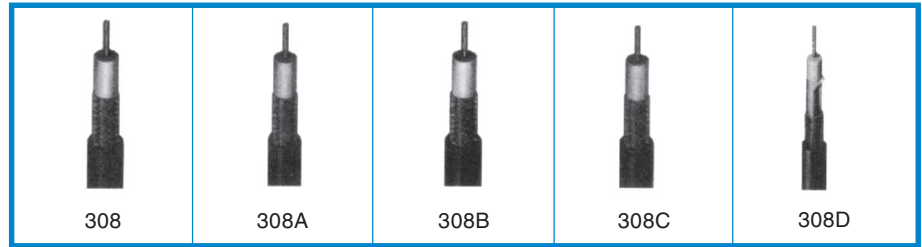

CUSTOM CATALOG NUMBER	SIZE	INSULATION CORE	SHIELD COVERAGE	NOMINAL O.D.	NOM. CAP. (pF/ft)	VEL. OF PROP. (%)	NOM. IMP. (Ω)	NOMINAL ATTENUATION		NOMINAL WEIGHT
	AWG/MCM	INCHES		INCHES				MHz	DB/100 FT	
308 RG8/U JAN-C-17A	13 AWG (7/21) Bare Copper	Solid Polyethylene 0.285	95% Bare Copper Braid	Black PVC	30.47	66	50	50	1.3	108
				0.405				100	2.1	
308A RG8 A/U UL Style 1354	13 AWG (7/21) Bare Copper	Solid Polyethylene 0.285	97% Bare Copper Braid	Black Non- Contaminating PVC	30.47	66	50	50	1.6	108
				0.405				100	2.2	
308B RG8/U	11 AWG (7/19) Bare Copper	Cellular Polyethylene 0.285	93% Bare Copper Braid	Black Polyethylene	26.7	78	50	50	1.1	100
				0.405				100	1.7	
308C RG8/U	11 AWG (19/24) Bare Copper	Cellular Polyethylene 0.285	95% Bare Copper Braid	Black PVC	26.7	78	50	50	1.2	99
				0.405				100	1.8	
308D RG8/U	9.5 AWG Solid Bare Copper	Semi-solid Polyethylene 0.285	100% Bonded Foil +88% Tin Copper Braid	Black PVC	24.8	84	50	50	0.9	98
				0.405				100	1.4	
								200	1.8	
								400	2.6	
								400	3.8	
								400	3.9	
								400	3.8	
								400	3.6	
								900	4.2	



UL Recognized Component
Underwriters Laboratories Inc.

OSHA Acceptable
Occupational Safety and Health
Administration

Custom Cable Corp.