

# COAXIAL CABLE

## BROADCAST APPLICATIONS


### Construction

#### Applications:

- Suitable for RF signal transmission.
- Broadcast.

#### Packaging:

- 1000 ft spools

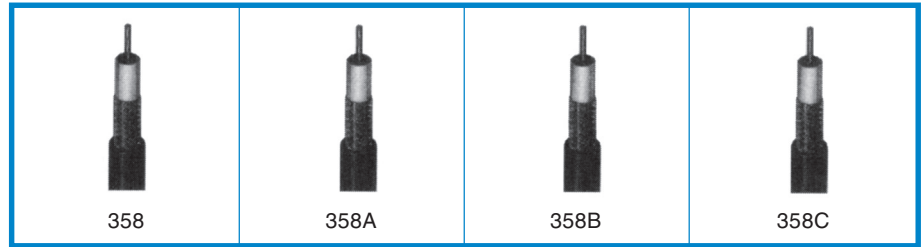

CUSTOM CATALOG NUMBER	SIZE	INSULATION CORE	SHIELD COVERAGE	NOMINAL O.D.	NOM. CAP. (pF/ft)	VEL. OF PROP. (%)	NOM. IMP. (Ω)	NOMINAL ATTENUATION		NOMINAL WEIGHT
	AWG/MCM	INCHES		INCHES				MHz	DB/100 FT	
<b>358</b> RG58/U NEC Type CL2 UL Style 1354	20 AWG (19/32) Tinned Copper	Cellular Polyethylene	95% Tinned Copper Braid	Black PVC	25.3	78	50	50	3.7	26
		0.116		0.195				100	4.8	
<b>358A</b> RG58 A/U Jan-C 17A	20 AWG (19/0072) Tinned Copper	Solid Polyethylene	95% Tinned Copper Braid	Black PVC	31.7	66	50	50	4.1	28
		0.116		0.195				100	5.3	
<b>358B</b> RG58/U Jan-C-17A	20 AWG Solid Bare Copper	Solid Polyethylene	95% Tinned Copper Braid	Black PVC	29.6	66	50	50	3.0	28
		0.116		0.195				100	4.5	
<b>358C</b> RG58 C/U	20 AWG (19/0072) Tinned Copper	Solid Polyethylene	95% Tinned Copper Braid	Black Non-Contaminating PVC	31.7	66	50	50	4.1	26
		0.116		0.195				100	5.3	
								200	8.2	
								400	12.6	
								900	20.1	



**UL** Recognized Component  
Underwriters Laboratories Inc.

**OSHA** Acceptable  
Occupational Safety and Health Administration

# Custom Cable Corp.