

COAXIAL CABLE

MINIATURE AND BROADCAST APPLICATIONS


Construction

Applications:

- Suitable for RF signal transmission.
- MATV.
- CATV.
- Closed circuit TV.

Packaging:

- 1000 ft spools.

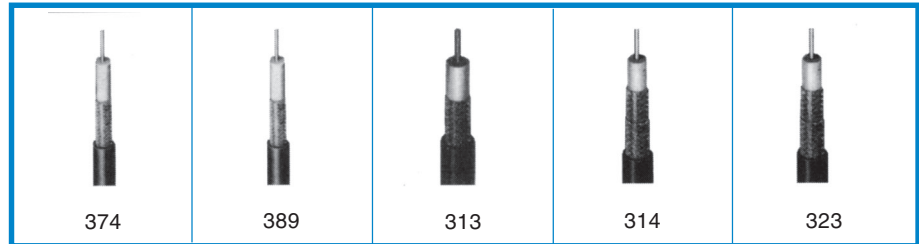

CUSTOM CATALOG NUMBER	SIZE	INSULATION CORE	SHIELD COVERAGE	NOMINAL O.D.	NOM. CAP. (pF/ft)	VEL. OF PROP. (%)	NOM. IMP. (Ω)	NOMINAL ATTENUATION		NOMINAL WEIGHT	
	AWG/MCM	INCHES		INCHES				MHz	DB/100 FT		LBS/MFT
374 RG174/U UL Style 1354	26 AWG (7/34) Bare Copperweld	Solid Polyethylene 0.060	95% Tinned Copper Braid	Black PVC	30.8	66	50	50	6.5	8	
				0.100				100	8.8		
								200	13.0		
								400	20.0		
389 Miniature UL Style 1354	27 AWG (7/35) Bare Copperweld	Solid Polyethylene 0.100	93% Bare Copper Braid	Black PVC	20.5	66	75	50	4.2	14	
				0.150				100	5.7		
								200	8.3		
								400	12.1		
								700	16.5		
								900	19.0		
313 RG213/U UL Style 1354	13 AWG (7/21) Bare Copper	Solid Polyethylene 0.285	95% Bare Copper Braid	Black Non- Contaminating PVC	30.8	66	50	50	1.4	108	
				0.405				100	2.1		
								200	3.1		
								400	5.0		
								600	6.5		
								1000	8.8		
314 RG214/U MIL-C-17F QPL	(7/0.0296) 0.089 Silver Coated Copper	Polyethylene 0.285	(2) Silver Coated Copper 98% Shield Coverage	0.425	30.8	78	50	1	0.2	133	
								10	0.6		
								50	1.5		
								100	2.1		
								200	3.0		
								400	4.8		
								700	6.5		
900	7.6										
1000	8.2										
4000	20.0										
323 RG223/U MIL-C-17F QPL	19 AWG (Solid) 0.035 Silver Coated Copper	Polyethylene 0.116	(2) Silver Coated Copper 97% Shield Coverage	0.212	30.8	66	50	1	0.4	37	
								10	1.2		
								50	2.8		
								100	4.1		
								200	6.0		
								400	8.8		
								700	12.0		
900	13.8										
1000	14.5										

R

Custom Cable Corp.

Recognized Component
Underwriters Laboratories Inc.

OSHA Acceptable
Occupational Safety and Health
Administration