


# SHIELDED PLENUM COMMUNICATIONS CABLES

UL LISTED TYPE MPP/CMP, c(UL) CMP, NEC ARTICLE 800 - 300 VOLT

## Construction

- Solid Bare Copper Conductors.
- Band Marked Plenum Insulation.
- Overall Aluminum/Polyester Shield & 24 AWG Solid T.C. Drainwire.
- White Plenum Rated Jacket.
- Multi-Pair **Shielded**.
- Maximum Operating Temperature: 75°C.
- "CMP"

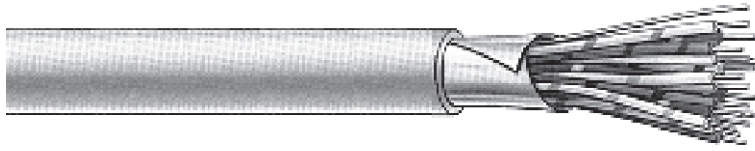

CUSTOM CATALOG NUMBER	SIZE	NUMBER OF PAIRS	NOMINAL O.D.	APPROX. WEIGHT
	AWG/MCM		INCHES	PER M. FT.
36200	24	2	.133	12
36201	24	3	.141	16
36202	24	4	.155	20
36203	24	6	.185	27
36204	24	12	.244	49
36205	24	25	.317	95
36206	24	50	.500	190
36207	24	100	.647	375
36220	22	2	.153	16
36221	22	3	.162	24
36222	22	4	.178	27
36223	22	6	.213	38
36224	22	12	.288	73
36225	22	25	.370	144
36226	22	50	.553	290
36227	22	100	.743	595

California State Fire Marshal Approved.  
Meets Cat. 1 Electrical Requirements.



# Custom Cable Corp.

242 Butler Street • Westbury, New York 11590-3193 • Tel: (516) 334-3600 • Toll Free: (800) 832-3600 • FAX: (516) 334-3989  
[www.customwireandcable.com](http://www.customwireandcable.com) • email: [sales@customwireandcable.com](mailto:sales@customwireandcable.com)