

# POWER LIMITED FIRE PROTECTIVE SIGNAL CABLE - SHIELDED 150°C PLENUM

(UL) FPLP - Also Classified New York City Certified Fire Alarm Cable - 300 Volt (Formally known as Local Laws 5)

## Construction

### Conductor:

- Fully annealed **solid** bare copper per ASTM B-3.

### Insulation:

- Color coded fluorocopolymer. (PVDF or Halar)

### Shield:

- 100% aluminum/polyester, 25% overlap, foil facing out.
- Stranded tinned copper drain wire.

### Jacket:

- Fluorocopolymer, **red** color, 150°C. (PVDF or Halar)
- Regular Capacitance.\*\*

### Applications:

- Inside/outside fire and burglar alarm systems.
- Smoke detection systems.
- Voice and digital communications systems.

### Features:


- Installation in air plenums without the use of conduit.
- Passes Steiner Tunnel Low Smoke and Flame Test.
- Outstanding oil and moisture resistance.
- Excellent electrical and mechanical properties.
- 40°C to +150°C.

### Industry Approvals:

- UL Subject 910, Smoke and Flame Test.
- NEC Article 760.

### Packaging:

- 1000 ft. spools.

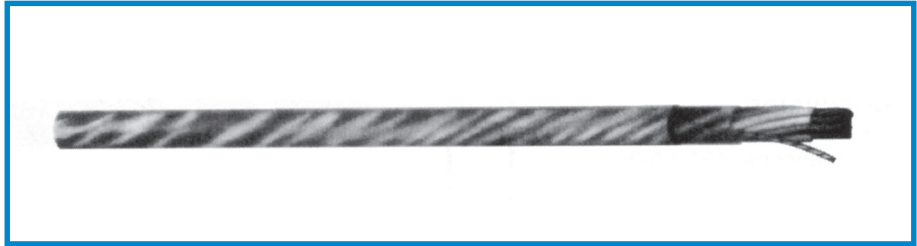

CUSTOM CATALOG NUMBER	SIZE	NUMBER OF PAIRS	STRAND	NOMINAL INSULATION THICKNESS (INCHES)		NOMINAL O.D. INCHES	NOMINAL WEIGHT LBS/MFT
	AWG/MCM			INSULATION	JACKET		
11001S	18	1	SOLID	0.015	0.025	0.196	29
11002S	18	2	SOLID	0.015	0.025	0.303	55
11020S	16	1	SOLID	0.015	0.025	0.217	38
11021S	16	2	SOLID	0.015	0.025	0.335	68
11022S	16	3	SOLID	0.015	0.025	0.361	90
11040S	14	1	SOLID	0.015	0.025	0.242	50
11041S	14	2	SOLID	0.015	0.025	0.386	90
11060S	12	1	SOLID	0.015	0.025	0.276	68
11061S	12	2	SOLID	0.015	0.025	0.444	125s

\*NOTE: Materials and construction subject to change without notice. We reserve the right to supply compounds approved for plenum applications by NEC and/or UL.

\*\*NOTE: Also available in a low capacitance 200°C construction. Other sizes and pair counts are available.

Please contact your sales office for availability and pricing.

### COLOR CODE CHART

- 1 Pair Black/Red.
- 2 Pair Black/Red, White/Green.
- 3 Pair Black/Red, Black/White, Black/Green.

U

# Custom Cable Corp.



242 Butler Street • Westbury, New York 11590-3193 • Tel: (516) 334-3600 • Toll Free: (800) 832-3600 • FAX: (516) 334-3989

[www.customwireandcable.com](http://www.customwireandcable.com) • email: [sales@customwireandcable.com](mailto:sales@customwireandcable.com)