

COAXIAL CABLE

CATV, MATV, AND COMPUTER APPLICATIONS


Construction

Applications:

- Suitable for RF signal transmission.
- MATV.
- Local area network.
- Citizen band radio.
- Cathode ray tube (CRT).

Packaging:

- 1000 ft spools.

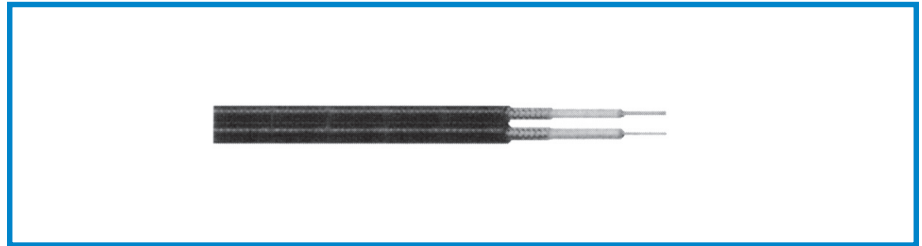

CUSTOM CATALOG NUMBER	SIZE	INSULATION CORE	SHIELD COVERAGE	NOMINAL O.D.	NOM. CAP. (pF/ft)	VEL. OF PROP. (%)	NOM. IMP. (Ω)	NOMINAL ATTENUATION		NOMINAL WEIGHT
	AWG/MCM	INCHES		INCHES				MHz	DB/100 FT	
8547 RG59/U Dual NEC Type CL2 UL Style 20063	23 AWG Solid Bare Copperweld	Solid Polyethylene	100% Alum. Mylar Over Each Dielectric Plus 85% Tinned Copper Braid	Black PVC	20.5	66	75	100	3.40	100
		0.144		0.242 x 0.485				200	4.90	



R

COAXIAL CABLE

COMPUTER APPLICATIONS


Construction

Applications:

- Suitable for RF signal transmission.
- Computer.

Packaging:

- 1000 ft spools.

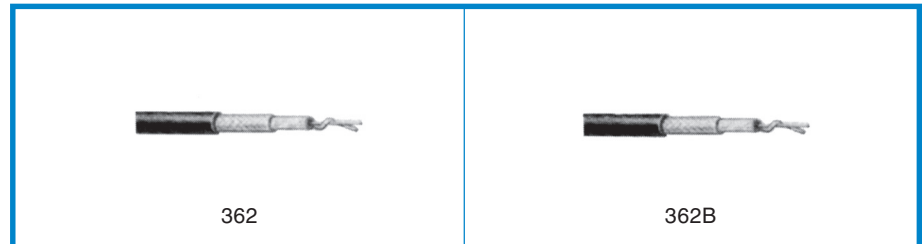

CUSTOM CATALOG NUMBER	SIZE	INSULATION CORE	SHIELD COVERAGE	NOMINAL O.D.	NOM. CAP. (pF/ft)	VEL. OF PROP. (%)	NOM. IMP. (Ω)	NOMINAL ATTENUATION		NOMINAL WEIGHT
	AWG/MCM	INCHES		INCHES				MHz	DB/100 FT	
362 RG62/U NEC Type CL2 UL Style 1354	22 AWG Solid Bare Copperweld	Semi-Solid Polyethylene	95% Bare Copper Braid	Black PVC	13.5	84	93	100	2.7	34
		0.146		0.242				200	3.8	
362B RG62/U NEC Type CL2 UL Style 1354	22 AWG Solid Bare Copperweld	Semi-Solid Polyethylene	95% Bare Copper Braid	Black PVC	13.5	84	93	100	2.7	42
		0.146		0.260				200	3.8	



Custom Cable Corp.